

---

### Features

---


- Fast Switching
- High Reliability
- High Conductance

---

### Mechanical Data

---

- Case: SOD-80/LL34, Glass
- Terminals: Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.05 grams (approx.)

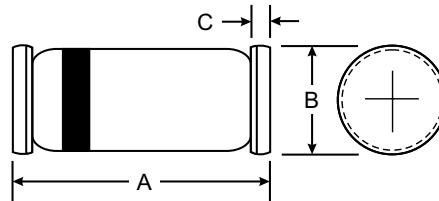

| LL34/ SOD-80 |      |      |
|--------------|------|------|
| Dim          | Min  | Max  |
| A            | 3.30 | 3.70 |
| B            | 1.30 | 1.60 |
| C            | 0.28 | 0.50 |

All Dimensions in mm

---

### Maximum Ratings and Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

---

| Parameter                       | Test condition   | Symbol     | Value |      | Unit |
|---------------------------------|--|------------|-------|------|------|
| Repetitive peak reverse voltage |  | $V_{RRM}$  | 75    |      | V    |
| Reverse voltage                 |  | $V_R$      | 50    |      | V    |
| Peak forward surge current      | $t_p = 1 \mu\text{s}$  | $I_{FSM}$  | 2     |      | A    |
| Repetitive peak forward current |  | $I_{FRM}$  | 450   |      | mA   |
| Forward continuous current      |  | $I_F$      | 200   |      | mA   |
| Average forward current         | $V_R = 0$  | $I_{FAV}$  | 150   |      | mA   |
| Power dissipation               |  | $P_V$      | 500   |      | mW   |
| Parameter                       | Test condition   | Symbol     | Min   | Typ. | Max  |
| Forward voltage                 | $I_F = 50 \text{ mA}$  | $V_F$      |       | 880  | 1000 |
| Reverse voltage                 | $V_R = 50 \text{ V}$   | $I_R$      |       |      | 50   |
|                                 | $V_R = 50 \text{ V}, T_j = 150^\circ\text{C}$                                    | $I_R$      |       |      | 50   |
| Breakdown voltage               | $I_R = 5 \mu\text{A}, t_p/T = 0.01, t_p = 0.3 \text{ ms}$                        | $V_{(BR)}$ | 75    |      | V    |
| Diode capacitance               | $V_R = 0, f = 1 \text{ MHz}, V_{HF} = 50 \text{ mV}$                             | $C_D$      |       |      | 2 pF |
| Reverse recovery time           | $I_F = I_R = 10 \text{ mA}, i_R = 1 \text{ mA}$                                  | $t_{rr}$   |       |      | 4 ns |
|                                 | $I_F = 10 \text{ mA}, V_R = 6 \text{ V}, i_R = 0.1 \times I_R, R_L = 100 \Omega$ | $t_{rr}$   |       |      | 2 ns |

