



VOLTAGE RANGE: 3.3 - 36V
POWER: 1.0Watts

Features

- Complete voltage range 3.3 to 36 volts
- High peak reverse power dissipation
- High reliability
- Low leakage current
- Standard zener voltage tolerance is $\pm 5\%$.

Mechanical Data

- Case : SMA (DO-214AC) Molded plastic
- Epoxy : UL94V-O rate flame retardant
- Lead : Lead formed for Surface mount
- Polarity : Color band denotes cathode end
- Mounting position : Any
- Weight: 0.064 grams (approx.)

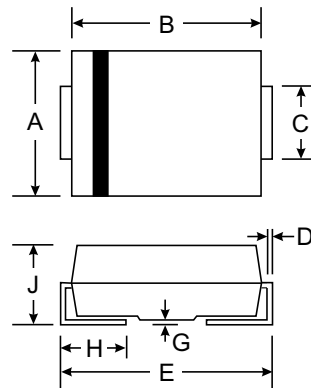

SMA(DO-214AC)		
Dim	Min	Max
A	2.29	2.92
B	4.00	4.60
C	1.27	1.63
D	0.15	0.31
E	4.80	5.59
G	0.10	0.20
H	0.76	1.52
J	2.01	2.62
All Dimensions in mm		

Maximum Ratings T_A = 25°C unless otherwise specified

Rating	Symbol	Value	Unit
DC Power Dissipation at T _L = 75 °C (Note1)	P _D	1.0	W
Maximum Forward Voltage at I _F = 200 mA	V _F	1.2	V
Junction Temperature Range	T _J	- 55 to + 150	°C
Storage Temperature Range	T _s	- 55 to + 150	°C

Note :

(1) P.C.B. Mounted on 0.31x0.31x0.08" (8x8x2mm) copper areas pads.



ELECTRICAL CHARACTERISTICS Rating at 25 °C ambient temperature unless otherwise specified

Type	Nominal Zener Voltage		Maximum Zener Impedance			Maximum Reverse Leakage Current		Maximum DC Zener Current	Maximum Surge Current
	V _Z @ I _{ZT}	I _{ZT}	Z _{ZT} @ I _{ZT}	Z _{ZK} @ I _{ZK}	I _{ZK}	I _R @ V _R	I _{ZM}	I _{RM} ⁽²⁾	
	(V)	(mA)	(Ω)	(Ω)	(mA)	(μA) (V)	(mA)	(mApk)	
PTZ3.3B	3.3	76.0	10	400	1.0	100 1.0	276	1380	
PTZ3.6B	3.6	69.0	10	400	1.0	100 1.0	252	1260	
PTZ3.9B	3.9	64.0	9.0	400	1.0	50 1.0	234	1190	
PTZ4.3B	4.3	58.0	9.0	400	1.0	10 1.0	217	1070	
PTZ4.7B	4.7	53.0	8.0	500	1.0	10 1.0	193	970	
PTZ5.1B	5.1	49.0	7.0	550	1.0	10 1.0	178	890	
PTZ5.6B	5.6	45.0	5.0	600	1.0	10 2.0	162	810	
PTZ6.2B	6.2	41.0	2.0	700	1.0	10 3.0	146	730	
PTZ6.8B	6.8	37.0	3.5	700	1.0	50 4.0	133	660	
PTZ7.5B	7.5	34.0	4.0	700	0.5	50 5.0	121	605	
PTZ8.2B	8.2	31.0	4.5	700	0.5	50 6.0	110	550	
PTZ9.1B	9.1	28.0	5.0	700	0.5	50 7.0	100	500	
PTZ10B	10	25.0	7.0	700	0.25	50 7.6	91	454	
PTZ11B	11	23.0	8.0	700	0.25	50 8.4	83	414	
PTZ12B	12	21.0	9.0	700	0.25	5.0 9.1	76	380	
PTZ13B	13	19.0	10	700	0.25	5.0 9.9	69	344	
PTZ15B	15	17.0	14	700	0.25	5.0 11.4	61	305	
PTZ16B	16	15.5	16	700	0.25	5.0 12.2	57	285	
PTZ18B	18	14.0	20	750	0.25	5.0 13.7	50	250	
PTZ20B	20	12.5	22	750	0.25	5.0 15.2	45	225	
PTZ22B	22	11.5	23	750	0.25	5.0 16.7	41	205	
PTZ24B	24	10.5	25	750	0.25	5.0 18.2	38	190	
PTZ27B	27	9.5	35	750	0.25	5.0 20.6	34	170	
PTZ30B	30	8.5	40	1000	0.25	5.0 22.8	30	150	
PTZ33B	33	7.5	45	1000	0.25	5.0 25.1	27	135	
PTZ36B	36	7.0	50	1000	0.25	5.0 27.4	25	125	

Notes :

(1) The type number listed have a standard tolerance on the nominal zener voltage of ± 5%.