



**VOLTAGE RANGE: 5.0 - 440 V**  
**POWER: 1500Watts**

### Features

- Glass Passivated Die Construction
- Uni- and Bi-Directional Versions Available
- Excellent Clamping Capability
- Fast Response Time
- Plastic Case Material has UL Flammability Classification Rating 94V-0

### Mechanical Data

- Case: SMC/DO-214AB, Molded Plastic
- Terminals: Solder Plated, Solderable per MIL-STD-750, Method 2026
- Polarity: Cathode Band or Cathode Notch
- Marking: Type Number
- Weight: 0.21 grams (approx.)

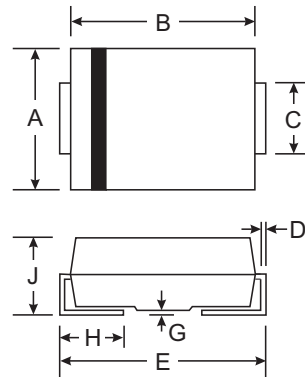

SMC/DO-214AB		
Dim	Min	Max
A	5.59	6.22
B	6.60	7.11
C	2.75	3.18
D	0.15	0.31
E	7.75	8.13
G	0.10	0.20
H	0.76	1.52
J	2.00	2.62
All Dimensions in mm		

### Maximum Ratings and Electrical Characteristics @ $T_A=25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Value	Unit
Peak Pulse Power Dissipation (Non repetitive current pulse derated above $T_A = 25^\circ\text{C}$ ) (Note 1)	$P_{PK}$	1500	W
Peak Forward Surge Current, 8.3ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method) (Notes 1, 2, & 3)	$I_{FSM}$	200	A
Steady State Power Dissipation @ $T_L = 75^\circ\text{C}$	$PM_{(AV)}$	5.0	W
Instantaneous Forward Voltage @ $I_{PP} = 100\text{A}$ (Notes 1 & 3)	$V_F$	See Note 5	V
Operating Temperature Range	$T_j$	-55 to +150	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-55 to +175	$^\circ\text{C}$

NOTES:1. Non-repetitive current pulse ,per Fig. 3 and derated above  $T_A=25^\circ\text{C}$  per Fig. 1.

2. Thermal Resistance junction to Lead.

3. 8.3ms single half-wave duty cycle=4 pulses per minutes maximum (uni-directional units only).

TYPE		Marking		Reverse Stand-Off Voltage	Breakdown Voltage Min. @I <sub>T</sub>	Breakdown Voltage Max. @ I <sub>T</sub>	Test Current	Maximum Clamping Voltage @I <sub>PP</sub>	Peak Pulse Current	Reverse Leakage @V <sub>RWM</sub>
(Uni)	(Bi)	(Uni)	(Bi)	V <sub>RWM</sub> (V)	V <sub>BR MIN</sub> (V)	V <sub>BR MAX</sub> (V)	I <sub>T</sub> (mA)	V <sub>C</sub> (V)	I <sub>PP</sub> (A)	I <sub>R</sub> (μA)
1SMC5.0	1SMC5.0C	GDD	BDD	5.0	6.40	7.55	10.0	9.6	156.3	800.0
1SMC5.0A	1SMC5.0CA	GDE	BDE	5.0	6.40	7.25	10.0	9.2	163.0	800.0
1SMC6.0	1SMC6.0C	GDF	BDF	6.0	6.67	8.45	10.0	11.4	131.6	800.0
1SMC6.0A	1SMC6.0CA	GDG	BDG	6.0	6.67	7.67	10.0	10.3	145.6	800.0
1SMC6.5	1SMC6.5C	GDH	BDH	6.5	7.22	9.14	10.0	12.3	122.0	500.0
1SMC6.5A	1SMC6.5CA	GDK	BDK	6.5	7.22	8.30	10.0	11.2	133.9	500.0
1SMC7.0	1SMC7.0C	GDL	BDL	7.0	7.78	9.86	10.0	13.3	112.8	200.0
1SMC7.0A	1SMC7.0CA	GDM	BDM	7.0	7.78	8.95	10.0	12.0	125.0	200.0
1SMC7.5	1SMC7.5C	GDN	BDN	7.5	8.33	10.67	1.0	14.3	104.9	100.0
1SMC7.5A	1SMC7.5CA	GDP	BDP	7.5	8.33	9.58	1.0	12.9	116.3	100.0
1SMC8.0	1SMC8.0C	GDQ	BDQ	8.0	8.89	11.3	1.0	15.0	100.0	50.0
1SMC8.0A	1SMC8.0CA	GDR	BDR	8.0	8.89	10.23	1.0	13.6	110.3	50.0
1SMC8.5	1SMC8.5C	GDS	BDS	8.5	9.44	11.92	1.0	15.9	94.3	20.0
1SMC8.5A	1SMC8.5CA	GDT	BDT	8.5	9.44	10.82	1.0	14.4	104.2	20.0
1SMC9.0	1SMC9.0C	GDU	BDU	9.0	10.0	12.6	1.0	16.9	88.8	10.0
1SMC9.0A	1SMC9.0CA	GDV	BDV	9.0	10.0	11.5	1.0	15.4	97.4	10.0
1SMC10	1SMC10C	GDW	BDW	10	11.1	14.1	1.0	18.8	79.8	5.0
1SMC10A	1SMC10CA	GDX	BDX	10	11.1	12.8	1.0	17.0	88.2	5.0
1SMC11	1SMC11C	GDY	BDY	11	12.2	15.4	1.0	20.1	74.6	5.0
1SMC11A	1SMC11CA	GDZ	BDZ	11	12.2	14.0	1.0	18.2	82.4	5.0
1SMC12	1SMC12C	GED	BED	12	13.3	16.9	1.0	22.0	68.2	5.0
1SMC12A	1SMC12CA	GEE	BEE	12	13.3	15.3	1.0	19.9	75.4	5.0
1SMC13	1SMC13C	GEF	BEF	13	14.4	18.2	1.0	23.8	63.0	5.0
1SMC13A	1SMC13CA	GEG	BEG	13	14.4	16.5	1.0	21.5	69.8	5.0
1SMC14	1SMC14C	GEH	BEH	14	15.6	19.8	1.0	25.8	58.1	5.0
1SMC14A	1SMC14CA	GEK	BEK	14	15.6	17.9	1.0	23.2	64.7	5.0
1SMC15	1SMC15C	GEL	BEL	15	16.7	21.1	1.0	26.9	55.8	5.0
1SMC15A	1SMC15CA	GEM	BEM	15	16.7	19.2	1.0	24.4	61.5	5.0
1SMC16	1SMC16C	GEN	BEN	16	17.8	22.6	1.0	28.8	52.1	5.0
1SMC16A	1SMC16CA	GEP	BEP	16	17.8	20.5	1.0	26.0	57.7	5.0
1SMC17	1SMC17C	GEQ	BEQ	17	18.9	23.9	1.0	30.5	49.2	5.0
1SMC17A	1SMC17CA	GER	BER	17	18.9	21.7	1.0	27.6	54.3	5.0
1SMC18	1SMC18C	GES	BES	18	20.0	25.3	1.0	32.2	46.6	5.0
1SMC18A	1SMC18CA	GET	BET	18	20.0	23.3	1.0	29.2	51.4	5.0
1SMC20	1SMC20C	GEU	BEU	20	22.2	28.1	1.0	35.8	41.9	5.0
1SMC20A	1SMC20CA	GEV	BEV	20	22.2	25.5	1.0	32.4	46.3	5.0
1SMC22	1SMC22C	GEW	BEW	22	24.4	30.9	1.0	39.4	38.1	5.0

TYPE		Marking		Reverse Stand-Off Voltage	Breakdown Voltage Min. @I <sub>T</sub>	Breakdown Voltage Max. @ I <sub>T</sub>	Test Current	Maximum Clamping Voltage @I <sub>PP</sub>	Peak Pulse Current	Reverse Leakage @V <sub>RWM</sub>
(Uni)	(Bi)	(Uni)	(Bi)	V <sub>RWM</sub> (V)	V <sub>BR MIN</sub> (V)	V <sub>BR MAX</sub> (V)	I <sub>T</sub> (mA)	V <sub>C</sub> (V)	I <sub>PP</sub> (A)	I <sub>R</sub> (uA)
1SMC22A	1SMC22CA	GEX	BEX	22	24.4	28.0	1.0	35.5	42.3	5.0
1SMC24	1SMC24C	GEY	BEY	24	26.7	33.8	1.0	43.0	34.9	5.0
1SMC24A	1SMC24CA	GEZ	BEZ	24	26.7	30.7	1.0	38.9	38.6	5.0
1SMC26	1SMC26C	GFD	BFD	26	28.9	36.6	1.0	46.6	32.2	5.0
1SMC26A	1SMC26CA	GFE	BFE	26	28.9	33.2	1.0	42.1	35.6	5.0
1SMC28	1SMC28C	GFF	BFF	28	31.1	39.4	1.0	50.0	30.0	5.0
1SMC28A	1SMC28CA	GFG	BFG	28	31.1	35.8	1.0	45.4	33.0	5.0
1SMC30	1SMC30C	GFH	BFH	30	33.3	42.2	1.0	53.5	28.0	5.0
1SMC30A	1SMC30CA	GFK	BFK	30	33.3	38.3	1.0	48.4	31.0	5.0
1SMC33	1SMC33C	GFL	BFL	33	36.7	46.5	1.0	59.0	25.4	5.0
1SMC33A	1SMC33CA	GFM	BFM	33	36.7	42.2	1.0	53.3	28.1	5.0
1SMC36	1SMC36C	GFN	BFN	36	40.0	50.7	1.0	64.3	23.3	5.0
1SMC36A	1SMC36CA	GFP	BFP	36	40.0	46.0	1.0	58.1	25.8	5.0
1SMC40	1SMC40C	GFQ	BFQ	40	44.4	56.3	1.0	71.4	21.0	5.0
1SMC40A	1SMC40CA	GFR	BFR	40	44.4	51.1	1.0	64.5	23.3	5.0
1SMC43	1SMC43C	GFS	BFS	43	47.8	60.5	1.0	76.7	19.6	5.0
1SMC43A	1SMC43CA	GFT	BFT	43	47.8	54.9	1.0	69.4	21.6	5.0
1SMC45	1SMC45C	GFU	BFU	45	50.0	63.3	1.0	80.3	18.7	5.0
1SMC45A	1SMC45CA	GFV	BFV	45	50.0	57.5	1.0	72.7	20.6	5.0
1SMC48	1SMC48C	GEH	BEH	48	53.3	67.5	1.0	85.5	17.5	5.0
1SMC48A	1SMC48CA	GEK	BEK	48	53.3	61.3	1.0	77.4	19.4	5.0
1SMC51	1SMC51C	GEL	BEL	51	56.7	71.8	1.0	91.1	16.5	5.0
1SMC51A	1SMC51CA	GEM	BEM	51	56.7	65.2	1.0	82.4	18.2	5.0
1SMC54	1SMC54C	GFW	BFW	54	60.0	76.0	1.0	96.3	15.6	5.0
1SMC54A	1SMC54CA	GFX	BFX	54	60.0	69.0	1.0	87.1	17.2	5.0
1SMC58	1SMC58C	GFY	BFY	58	64.4	81.6	1.0	103	14.6	5.0
1SMC58A	1SMC58CA	GFZ	BFZ	58	64.4	74.1	1.0	93.6	16.0	5.0
1SMC60	1SMC60C	GGD	BGD	60	66.7	84.5	1.0	107	14.0	5.0
1SMC60A	1SMC60CA	GGE	BGE	60	66.7	76.7	1.0	96.8	15.5	5.0
1SMC64	1SMC64C	GGF	BGF	64	71.1	90.1	1.0	114	13.2	5.0
1SMC64A	1SMC64CA	GGG	BGG	64	71.1	81.8	1.0	103	14.6	5.0
1SMC70	1SMC70C	GGH	BGH	70	77.8	98.6	1.0	125	12.0	5.0
1SMC70A	1SMC70CA	GGK	BGK	70	77.8	89.5	1.0	113	13.3	5.0
1SMC75	1SMC75C	GGL	BGL	75	83.0	105.7	1.0	134	11.2	5.0
1SMC75A	1SMC75CA	GGM	BGM	75	83.0	95.8	1.0	121	12.4	5.0
1SMC78	1SMC78C	GGN	BGN	78	86.0	109.8	1.0	139	10.8	5.0

TYPE		Marking		Reverse Stand-Off Voltage	Breakdown Voltage Min. @I <sub>T</sub>	Breakdown Voltage Max. @ I <sub>T</sub>	Test Current	Maximum Clamping Voltage @I <sub>PP</sub>	Peak Pulse Current	Reverse Leakage @V <sub>RWM</sub>
(Uni)	(Bi)	(Uni)	(Bi)	V <sub>RWM</sub> (V)	V <sub>BR MIN</sub> (V)	V <sub>BR MAX</sub> (V)	I <sub>T</sub> (mA)	V <sub>C</sub> (V)	I <sub>PP</sub> (A)	I <sub>R</sub> (uA)
1SMC78A	1SMC78CA	GGP	BGP	78	86.0	99.7	1.0	126	11.9	5.0
1SMC85	1SMC85C	GGQ	BGQ	85	94.0	119.2	1.0	151	9.9	5.0
1SMC85A	1SMC85CA	GGR	BGR	85	94.0	108.2	1.0	137	10.9	5.0
1SMC90	1SMC90C	GGS	BGS	90	100	126.5	1.0	160	9.4	5.0
1SMC90A	1SMC90CA	GGT	BGT	90	100	115.5	1.0	146	10.3	5.0
1SMC100	1SMC100C	GGU	BGU	100	111	141.0	1.0	179	8.4	5.0
1SMC100A	1SMC100CA	GGV	BGV	100	111	128.0	1.0	162	9.3	5.0
1SMC110	1SMC110C	GGW	BGW	10	122	154.5	1.0	196	7.7	5.0
1SMC110A	1SMC110CA	GGX	BGX	110	122	140.5	1.0	177	8.5	5.0
1SMC120	1SMC120C	GGY	BGY	120	133	169.0	1.0	214	7.0	5.0
1SMC120A	1SMC120CA	GGZ	BGZ	120	133	153.0	1.0	193	7.8	5.0
1SMC130	1SMC130C	GHD	BHD	130	144	182.5	1.0	231	6.5	5.0
1SMC130A	1SMC130CA	GHE	BHE	130	144	165.5	1.0	209	7.2	5.0
1SMC150	1SMC150C	GHF	BHF	150	167	211.5	1.0	268	5.6	5.0
1SMC150A	1SMC150CA	GHG	BHG	150	167	192.5	1.0	243	6.2	5.0
1SMC160	1SMC160C	GHH	BHH	160	178	226.0	1.0	287	5.2	5.0
1SMC160A	1SMC160CA	GHK	BHK	160	178	205.0	1.0	259	5.8	5.0
1SMC170	1SMC170C	GHL	BHL	170	189	239.5	1.0	304	4.9	5.0
1SMC170A	1SMC170CA	GHM	BHM	170	189	217.5	1.0	275	5.5	5.0
1SMC180	1SMC180C	GHN	BHN	180	200	253.8	1.0	321	4.7	5.0
1SMC180A	1SMC180CA	GHP	BHP	180	200	230.4	1.0	290	5.2	5.0
1SMC190	1SMC190C	GHQ	BHQ	190	211	267.9	1.0	339	4.4	5.0
1SMC190A	1SMC190CA	GHR	BHR	190	211	243.2	1.0	306	4.9	5.0
1SMC200	1SMC200C	GHW	BHW	200	222	282.0	1.0	356	4.2	5.0
1SMC200A	1SMC200CA	GHX	BHX	200	222	256.0	1.0	322	4.7	5.0
1SMC210	1SMC210C	GHY	BHY	210	233	296.1	1.0	375	4.0	5.0
1SMC210A	1SMC210CA	GHZ	BHZ	210	233	268.8	1.0	339	4.4	5.0
1SMC220	1SMC220C	GJD	BJD	220	244	310.2	1.0	392	3.8	5.0
1SMC220A	1SMC220CA	GJE	BJE	220	244	281.6	1.0	355	4.2	5.0
1SMC250	1SMC250C	GJF	BJF	250	278	342.5	1.0	447	3.4	5.0
1SMC250A	1SMC250CA	GJG	BJG	250	278	309.0	1.0	403	3.7	5.0
1SMC300	1SMC300C	GJH	BJH	300	333	411.0	1.0	535	2.8	5.0
1SMC300A	1SMC300CA	GJK	BJK	300	333	371.0	1.0	484	3.1	5.0
1SMC350	1SMC350C	GJL	BJL	350	389	479.5	1.0	624	2.4	5.0
1SMC350A	1SMC350CA	GJM	BJM	350	389	432.0	1.0	565	2.7	5.0
1SMC400	1SMC400C	GJN	BJN	400	444	548.0	1.0	687	2.2	5.0
1SMC400A	1SMC400CA	GJP	BJP	400	444	494.0	1.0	645	2.3	5.0
1SMC440	1SMC440C	GJQ	BJQ	440	489	602.8	1.0	786	1.9	5.0
1SMC440A	1SMC440CA	GJR	BJR	440	489	543.0	1.0	710	2.1	5.0

