


VOLTAGE RANGE: 50 - 1000V
CURRENT: 1.0 A

Features

- Glass Passivated Junction
- High Current Capability
- Low Forward Voltage Drop
- High Reliability and Low Leakage
- For Surface Mount Application
- Plastic Material - UL Flammability Classification Rating 94V-0

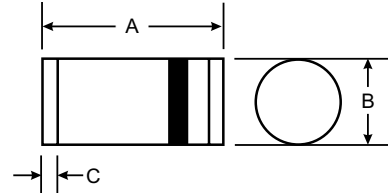

Mechanical Data

- Case: LL41(DO-213AB), Plastic
- Terminals: Solderable per MIL-STD-202, Method 208
- Polarity: Cathode band
- Mounting Position: Any
- Approx Weight: 0.25 grams

LL41/ DO-213AB		
Dim	Min	Max
A	4.80	5.20
B	2.40	2.60
C	0.55 Nominal	
All Dimensions in mm		



Maximum Ratings and Electrical Characteristics @ T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	BYM10-50	BYM10-100	BYM10-200	BYM10-400	BYM10-600	BYM10-800	BYM10-1000	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	50	100	200	400	600	800	1000	V
RMS Reverse Voltage	V _{R(RMS)}	35	71	141	283	424	566	707	V
Maximum Average Forward Rectified Current @ Terminal Temp @ T _T = 75°C	I _O	1.0							A
Peak Forward Surge Current 8.3ms single half sine-wave Superimposed on Rated Load (JEDEC Method)	I _{FSM}	30							A
Maximum Forward Voltage @ I _F = 1.0A	V _F	1.1							V
Maximum dc Reverse Current @ T _A = 25°C Rated DC Blocking Voltage @ T _A = 100°C	I _R	5.0 50							μA
Typical Thermal Resistance, Junction to Ambient Air	R _{θJA}	50							K/W
Typical Junction Capacitance (Note 1)	C _j	15							pF
Operating and Storage Temperature Range	T _j , T _{STG}	-55 to +150							°C

Notes: 1. Measured at 1.0MHz and applied reverse voltage of 4.0 volts.

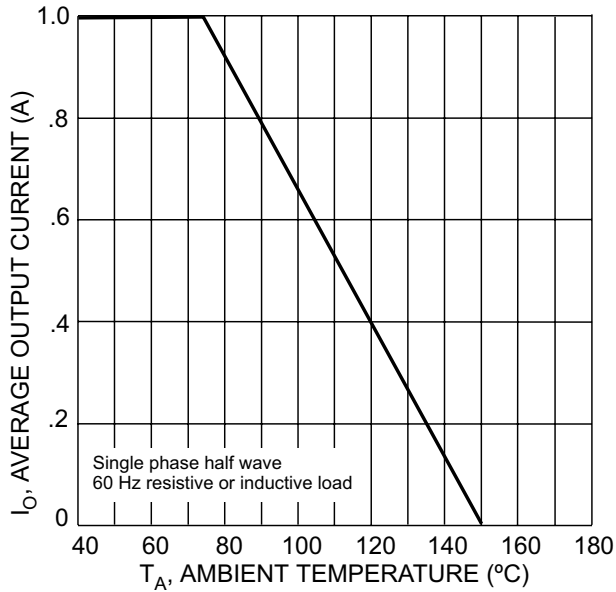


Fig. 1 Forward Current Derating Curve

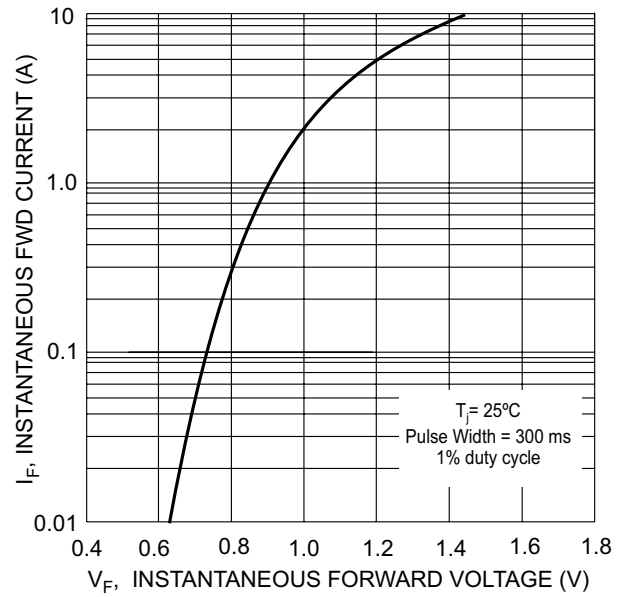


Fig. 2 Typical Forward Characteristics

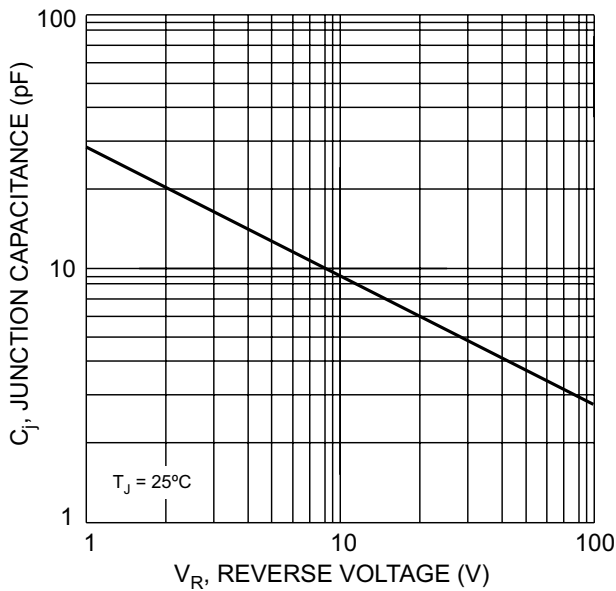


Fig. 3 Typical Junction Capacitance

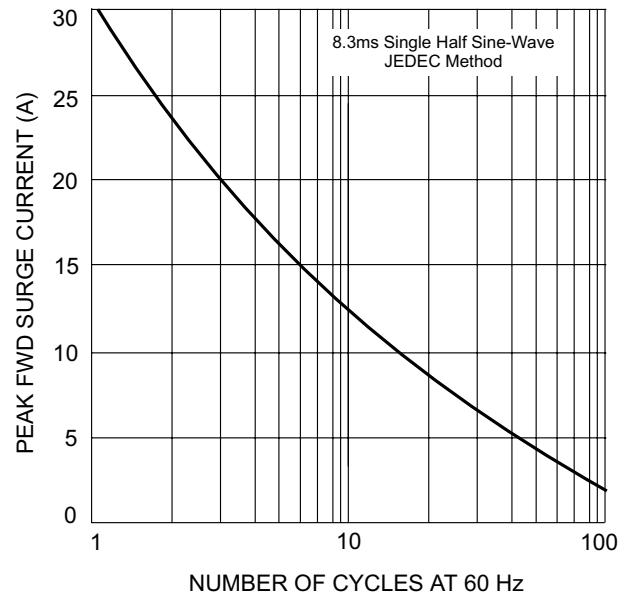


Fig. 4 Max Non-Repetitive Peak Fwd Surge Current