



VOLTAGE RANGE: 200 - 1000V
CURRENT: 0.25 - 0.5A

Features

- Low cost
- Diffused junction
- Low leakage
- Low forward voltage drop
- Easily cleaned with freon, Alcohol, Isopropand and similar solvents

Mechanical Data

- Case: D O - 4 1 Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.34 grams (approx.)
- Mounting Position: Any
- Marking: Type Number

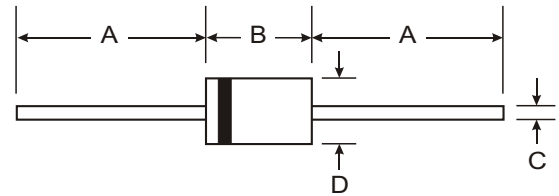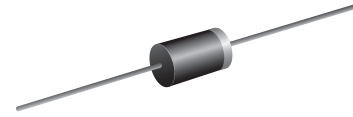

DO-41		
Dim	Min	Max
A	25.40	—
B	4.06	5.21
C	0.71	0.864
D	2.00	2.72
All Dimensions in mm		



Maximum Ratings and Electrical Characteristics T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	EU1Z	EU1	EU1A	EU1C	Unit
Maximum peak repetitive reverse voltage	V _{RRM}	200	400	600	1000	V
Maximum RMS voltage	V _{RMS}	140	280	420	700	V
Maximum DC blocking voltage	V _{DC}	200	400	600	1000	V
Maximum average forward rectified current 9.5mm lead length @T _A =75°C	I _{F(AV)}	0.25			0.5	A
Peak forward surge current 10ms single half-sine-wave superimposed on rated load @T _J =125°C	I _{FSM}	15.0				A
Maximum instantaneous forward voltage @ I _F =I _{F(AV)}	V _F	2.5				V
Maximum reverse current at Rated DC blocking voltage @T _A =25°C @T _A =100°C	I _R	10.0 150.0				μ A
Maximum reverse recovery time (Note1)	t _{rr}	100				ns
Typical junction capacitance (Note2)	C _J	20	15			pF
Typical thermal resistance (Note3)	R _{θJL}	17				°C/W
Operating junction temperature range	T _J	- 55 ----- + 150				°C
Storage temperature range	T _{STG}	- 55 ----- + 150				°C

NOTE: 1. Measured with I_F=0.5A, I_R=1A, I_{rr}=0.25A.
 2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
 3. Thermal resistance junction to ambient.

FIG.1 – TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

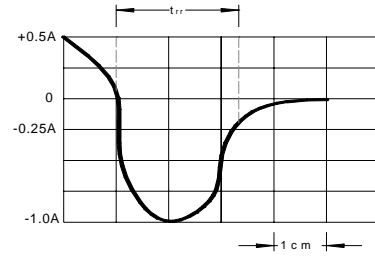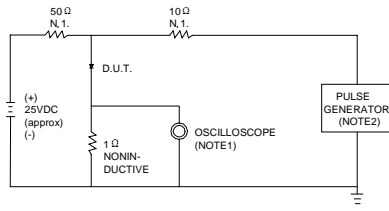

NOTES:1.RISE TIME = 7ns MAX.INPUT IMPEDANCE =1MΩ. 22pF.
2.RISE TIME =10ns MAX.SOURCE IMPEDANCE=50 Ω.

SET TIME BASE FOR 10/20 ns/cm

FIG.2 – TYPICAL FORWARD CHARACTERISTIC

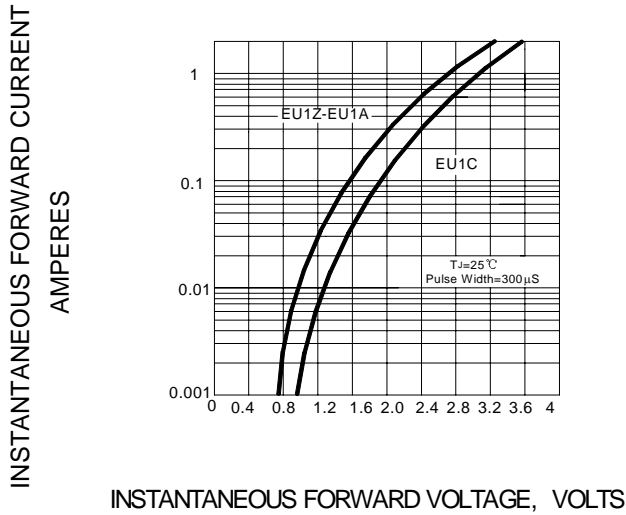


FIG.3 – FORWARD DERATING CURVE

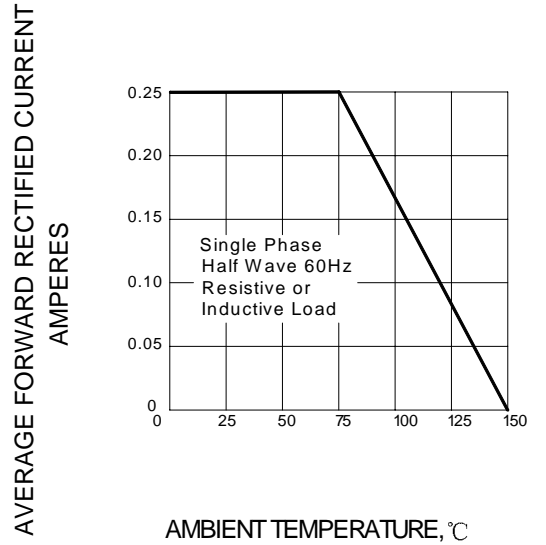


FIG.4 – PEAK FORWARD SURGE CURRENT

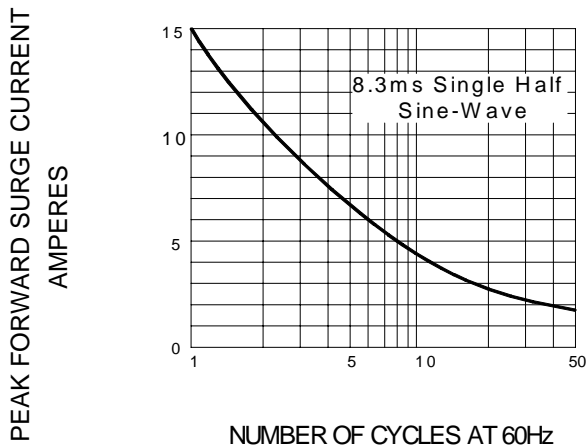


FIG.3–TYPICAL JUNCTION CAPACITANCE

