

Features


- Detection efficiency is very good.
- Small temperature coefficient.
- High reliability with glass seal.

Mechanical Data

- Case: DO-35, glass case
- Polarity: Color band denotes cathode
- Weight: 0.004 ounces, 0.13 grams



DO-35(GLASS)

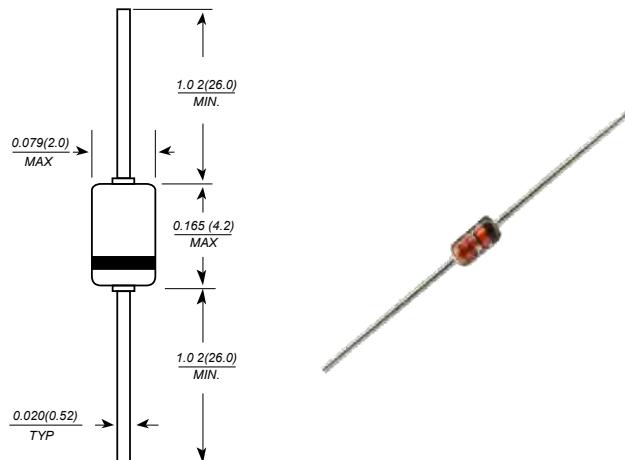

Maximum Ratings $T_A = 25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Value	Unit
Reverse Voltage	V_R	10	V
Average Forward Current	I_O	30	mA
Junction Temperature	T_J	125	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 125	$^\circ\text{C}$

Electrical Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit
Forward Current at $V_F = 1 \text{ V}$	I_F	4.5	-	mA
Reverse Current at $V_R = 6 \text{ V}$	I_R	-	70	μA
Capacitance at $V_R = 1 \text{ V}$, $f = 1 \text{ MHz}$	C	-	1.5	pF
Rectifier Efficiency at $V_{in} = 2 \text{ Vrms}$, $f = 40 \text{ MHz}$, $R_L = 5 \text{ K}\Omega$, $C_L = 20 \text{ pF}$	η	70	-	%
ESD Capability ¹⁾ at $C = 200 \text{ pF}$, both forward and reverse direction 1 pulse.	-	100	-	V

¹⁾ Failure criterion: $I_R \geq 140 \mu\text{A}$ at $V_R = 6 \text{ V}$