

VOLTAGE RANGE: 50 -1000V
CURRENT: 1.0 A

Features


- Ideal for Printed Circuit Board
- Reliable low cost construction utilizing molded plastic technique
- High surge current capability
- Plastic Package - UL Flammability Classification 94V-0

Mechanical Data

- Case: Molded plastic body
- Terminals: Plated leads solderable per MIL-STD-750, Method 2026
- Polarity : Polarity symbols marked on case
- Mounting Position: Any
- Weight: 0.02 ounce, 0.4 grams



DBS

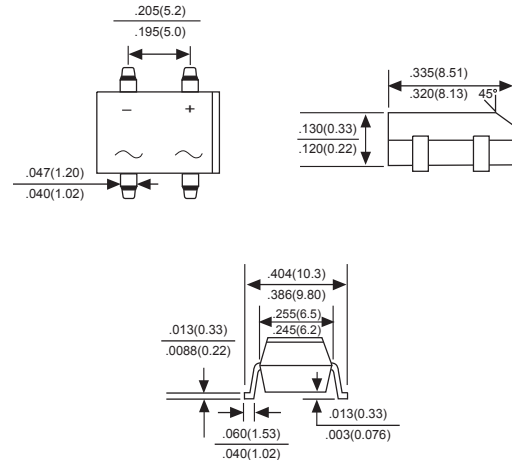

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	DB 101S	DB 102S	DB 103S	DB 104S	DB 105S	DB 106S	DB 107S	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current at $T_A=40^*$	$I_{F(AV)}$	1.0							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	50							A
Maximum instantaneous forward voltage drop per bridge element at 1.0A	V_F	1.1							V
Maximum DC reverse current at rated DC blocking voltage $T_A=25^*$ $T_A=125^*$	I_R	10 500							μA μA
Operating temperature range	T_J	-55 to +150							$^\circ\text{C}$
storage temperature range	T_{STG}	-55 to +150							$^\circ\text{C}$

NOTES: DBS for surface mount package.



RATINGS AND CHARACTERISTIC CURVES DB101S THRU DB107S

FIG. 1- MAXIMUM DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

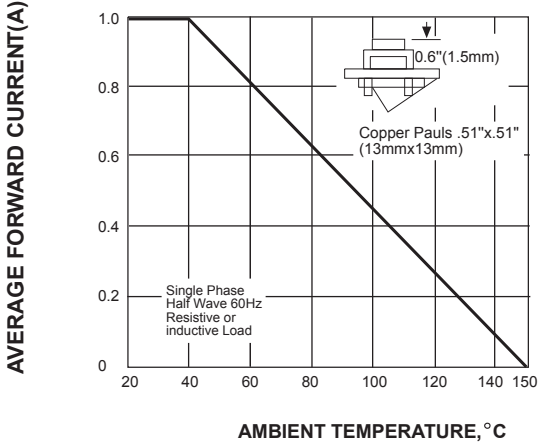


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

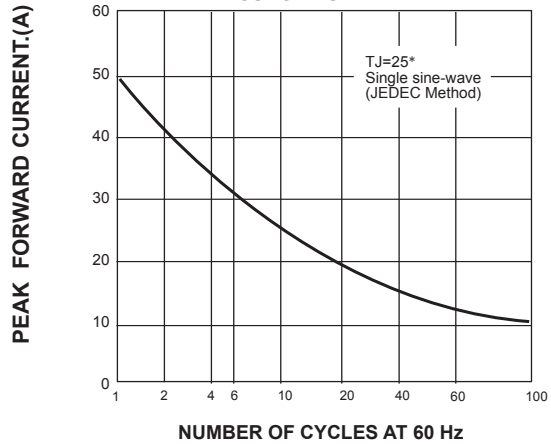


FIG. 3-TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

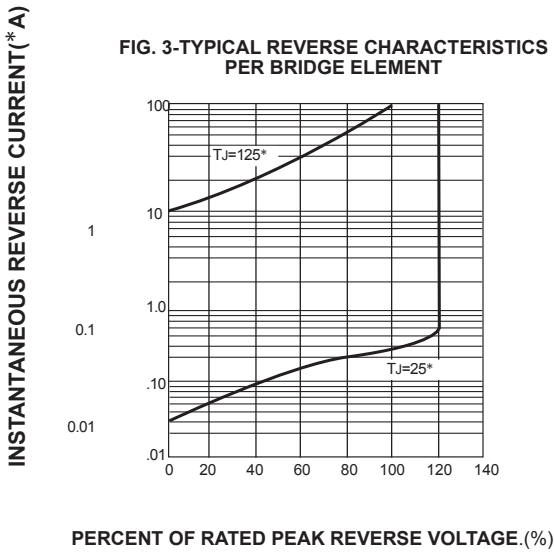


FIG. 4-TYPICAL FORWARD CHARACTERISTICS PER BRIDGE ELEMENT

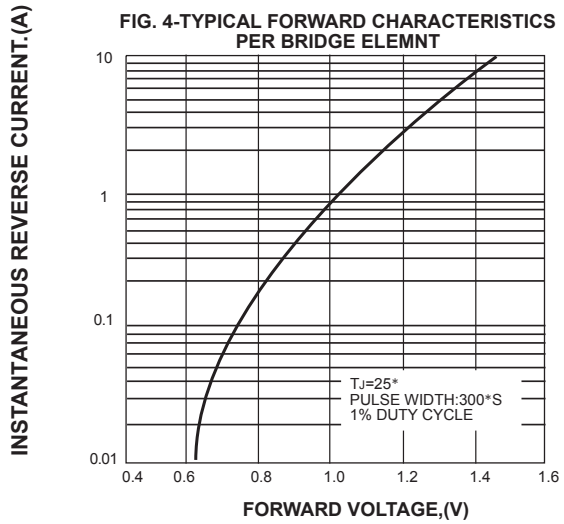


FIG. 3-TYPICAL JUNCTION CAPACITANCE PER BRIDGE ELEMENT

