


VOLTAGE RANGE: 50 - 1000V
CURRENT: 1.5 A

Features


- Rating to 1000VPRV
- Ideal for printed circuit board
- Low forward voltage drop, high current capability
- Reliable low cost construction utilizing molded plastic
- The plastic material has UL flammability classification 94V-0

Mechanical Data

- Case: Molded plastic body
- Terminals: Plated leads solderable per MIL-STD-750, Method 2026
- Polarity: Polarity symbols marked on case
- Mounting Position: Any
- Weight: 0.02 ounce, 0.4 grams



DBS




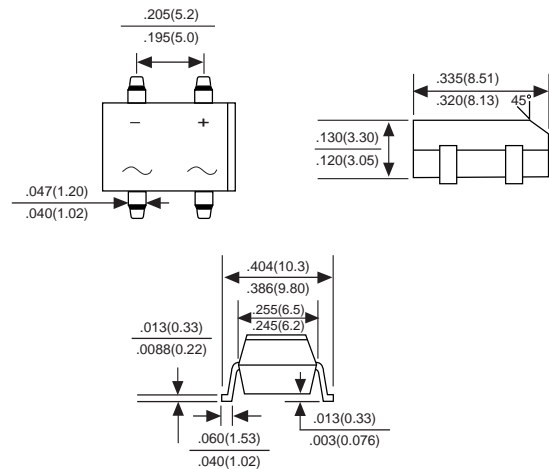


Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	DB151S	DB152S	DB153S	DB154S	DB155S	DB156S	DB157S	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current at $T_A=40^\circ$	$I_{F(AV)}$	1.5							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	50							Amps
Maximum instantaneous forward voltage drop per bridge element at 1.5A	V_F	1.1							V
Maximum DC reverse current $T_A=25^\circ$ at rated DC blocking voltage $T_A=125^\circ$	I_R	10 500							μA μA
Operating temperature range	T_J	-55 to +150							$^\circ\text{C}$
storage temperature range	T_{STG}	-55 to +150							$^\circ\text{C}$

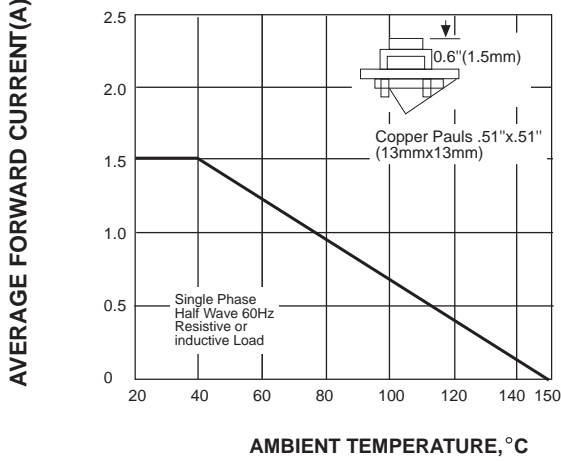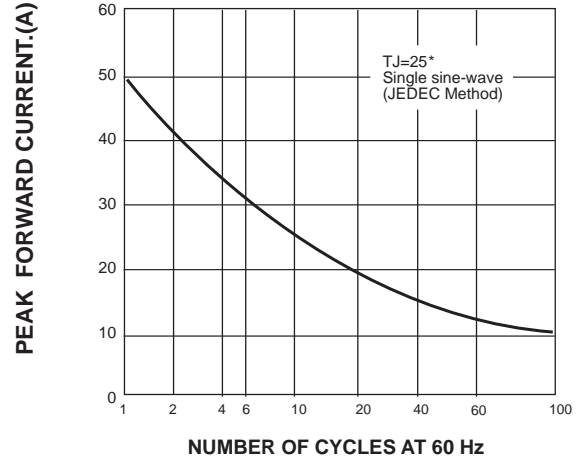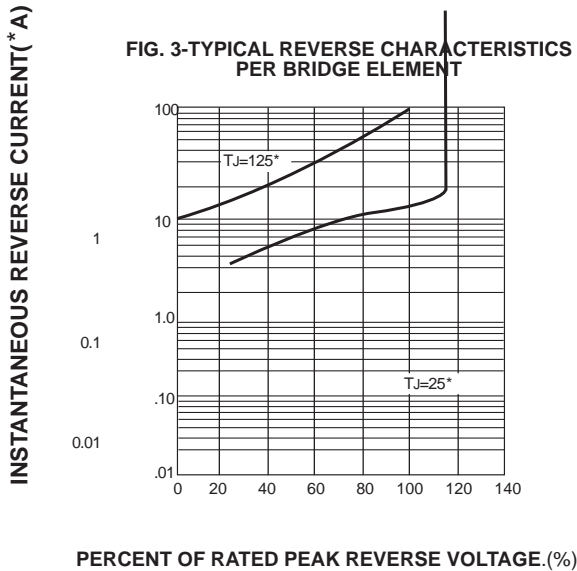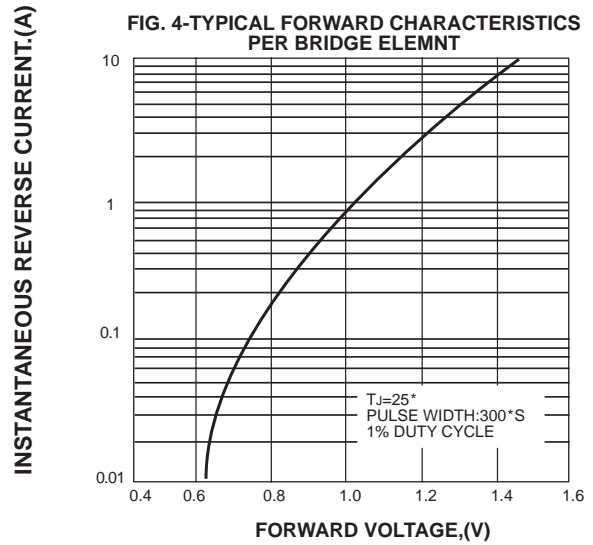RATINGS AND CHARACTERISTIC CURVES DB151S THRU DB157S
FIG. 1- MAXIMUM DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

FIG. 2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

FIG. 3- TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

FIG. 4- TYPICAL FORWARD CHARACTERISTICS PER BRIDGE ELEMENT

FIG. 3- TYPICAL JUNCTION CAPACITANCE PER BRIDGE ELEMENT
