

Features

- Fast Switching Speed
- Glass Package Version for High Reliability
- High Conductance

Mechanical Data

- Case: SOD-80/LL34, Glass
- Terminals: Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.05 grams (approx.)



LL34/ SOD-80		
Dim	Min	Max
A	3.30	3.70
B	1.30	1.60
C	0.28	0.50
All Dimensions in mm		


Maximum Ratings T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Non-Repetitive Peak Reverse Voltage	V _{RM}	100	V
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{R(RM)} V _{R(WM)} V _R	75	V
RMS Reverse Voltage	V _{R(RMS)}	53	V
Forward Continuous Current (Note 1)	I _{FM}	300	mA
Rectified Current (Average), Half Wave Rectification with Resistive Load and f ≥ 50MHz (Note 1)	I _O	150	mA
Non-Repetitive Peak Forward Surge Current @ t = 1.0s @ t = 1.0μs	I _{FSM}	1.0 2.0	A
Power Dissipation (Note 1) Derate Above 25°C	P _d	500 1.68	mW mW/°C
Thermal Resistance, Junction to Ambient Air (Note 1)	R _{θJA}	300	K/W
Operating and Storage Temperature Range	T _j , T _{STG}	-65 to +175	°C

Electrical Characteristics @T_A=25°C unless otherwise specified


Characteristic	Symbol	Min	Max	Unit	Test Condition
Maximum Forward Voltage	V _{FM}	—	1.0	V	I _F = 10mA
Maximum Peak Reverse Current	I _{RM}	—	5.0 50 30 25	μA μA μA nA	V _R = 75V V _R = 70V, T _j = 150°C V _R = 20V, T _j = 150°C V _R = 20V
Capacitance	C _j	—	4.0	pF	V _R = 0, f = 1.0MHz
Reverse Recovery Time	t _{rr}	—	4.0	ns	I _F = 10mA to I _R = 1.0mA V _R = 6.0V, R _L = 100Ω

Note: 1. Diode on Ceramic Substrate 10mm x 8mm x 0.7mm.

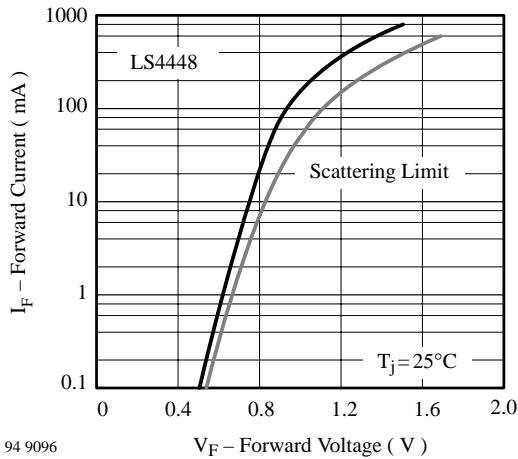


94 9096

Figure 1. Forward Current vs. Forward Voltage

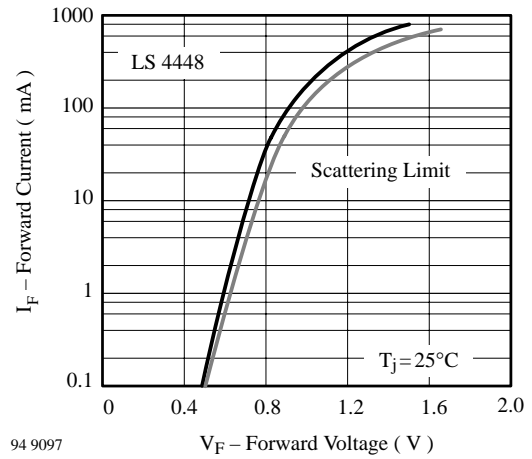


94 9097

Figure 2. Forward Current vs. Forward Voltage

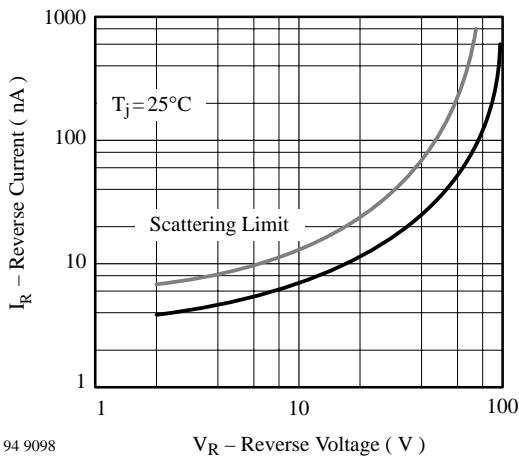

94 9098

Figure 3. Reverse Current vs. Reverse Voltage

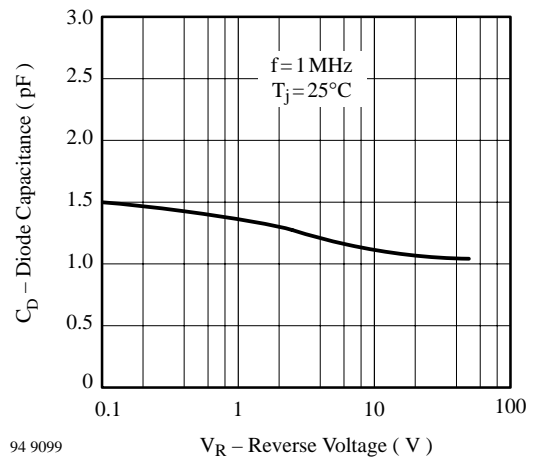

94 9099

Figure 4. Diode Capacitance vs. Reverse Voltage