

VOLTAGE RANGE: 200 - 1000V
CURRENT: 1.0 A

Features


- Glass passivated
- High maximum operating temperature
- Low leakage current
- Excellent stability
- Guaranteed avalanche energy absorption capability

Mechanical Data

- Case: SOD-57 sintered glass case
- Terminal: Plated axial leads solderable per
- MIL-STD 202E, method 208C
- Polarity: color band denotes cathode end
- Mounting position: any



SOD-57

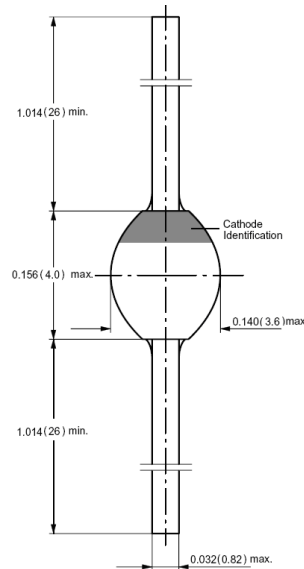

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	BYV26A	BYV26B	BYV26C	BYV26D	BYV26E	Unit
Maximum recurrent peak reverse voltage	V_{RRM}	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	200	400	600	800	1000	V
Maximum average forward rectified current 9.5 mm lead length, @ $T_A=75^\circ\text{C}$	$I_{F(AV)}$	1.0					A
Peak forward surge current 10ms single half-sine-wave superimposed on rated load @ $T_J=125^\circ\text{C}$	I_{FSM}	30.0					A
Maximum instantaneous forward voltage @ 1.0A	V_F	2.5					V
Maximum reverse current @ $T_A=25^\circ\text{C}$ at rated DC blocking voltage @ $T_A=100^\circ\text{C}$	I_R	5.0 150.0					μA
Maximum reverse recovery time (Note1)	t_{rr}	30			75		ns
Typical junction capacitance (Note2)	C_J	45			40		pF
Typical thermal resistance (Note3)	$R_{\theta JA}$	100					$^\circ\text{C/W}$
Operating junction temperature range	T_J	- 55 ----- + 150					$^\circ\text{C}$
Storage temperature range	T_{STG}	- 55 ----- + 150					$^\circ\text{C}$

NOTE: 1. Measured with $I_F=0.5\text{A}$, $I_R=1\text{A}$, $I_{rr}=0.25\text{A}$.

2. Measured at 1MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance from junction to ambient.



FIG.1 – FORWARD DERATING CURVE

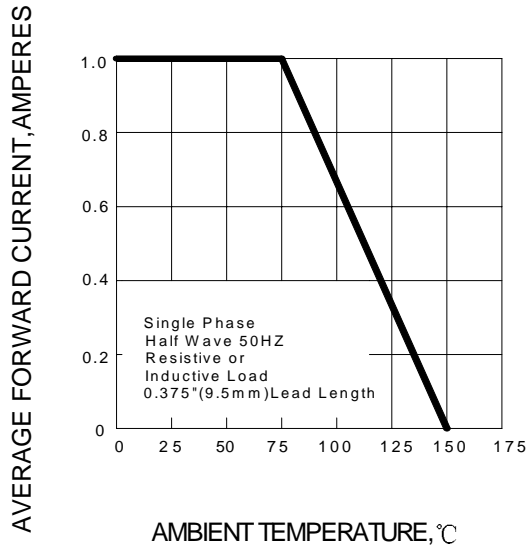


FIG.2 – TYPICAL FORWARD CHARACTERISTIC

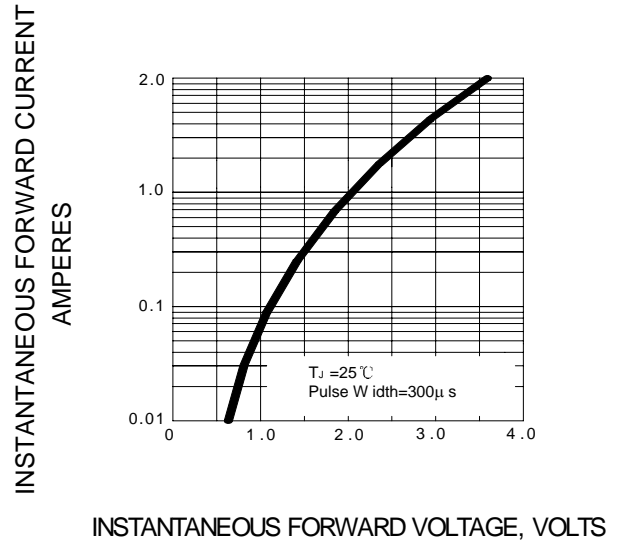


FIG.3 –PEAK FORWARD SURGE CURRENT

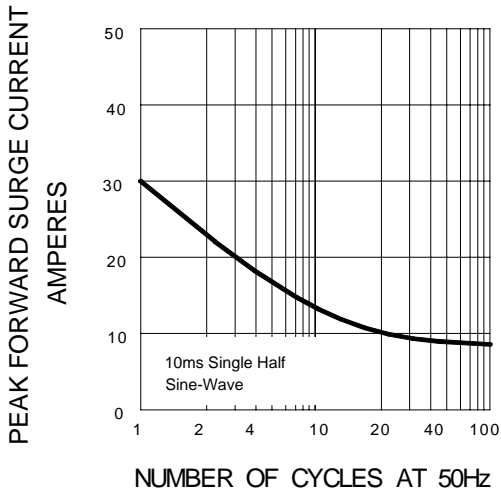


FIG.4 – TYPICAL JUNCTION CAPACITANCE

