



VOLTAGE RANGE: 400 - 600V
CURRENT: 0.5 A

Features

- Low leakage
- Low forward voltage drop
- High current capability
- Easily cleaned with alcohol, Isopropanol and similar solvents
- The plastic material carries U/L recognition 94V-0

Mechanical Data

- Case: DO-41, molded plastic
- Terminals: Axial lead, solderable per MIL-STD-202, Method 208
- Polarity: Color band denotes cathode
- Weight: 0.012 ounces, 0.34 grams
- Mounting position: Any

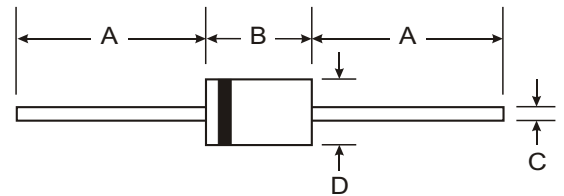

DO-41		
Dim	Min	Max
A	25.40	—
B	4.06	5.21
C	0.71	0.864
D	2.00	2.72
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.



Characteristic	Symbol	ERA38 - 04	ERA38 - 05	ERA38 - 06	Unit
Maximum recurrent peak reverse voltage	V_{RRM}	400	500	600	V
Maximum RMS voltage	V_{RMS}	280	350	420	V
Maximum DC blocking voltage	V_{DC}	400	500	600	V
Maximum average forward rectified current 9.5mm lead length, @T _A =75°C	$I_{F(AV)}$	0.5			A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @T _J =125°C	I_{FSM}	10.0			A
Maximum instantaneous forward voltage @ 0.5A	V_F	2.50			V
Maximum reverse current @T _A =25°C at rated DC blocking voltage @T _A =100°C	I_R	5.0 50.0			μA
Maximum reverse recovery time (Note1)	t_{rr}	50			ns
Typical junction capacitance (Note2)	C_J	20		15	pF
Typical thermal resistance (Note3)	$R_{\theta JA}$	60			°C/W
Operating junction temperature range	T_J	- 55 ----- + 150			°C
Storage temperature range	T_{STG}	- 55 ----- + 150			°C

NOTE: 1. Measured with $I_F=0.5A$, $I_R=1A$, $I_{rr}=0.25A$.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance from junction to ambient.

FIG.1-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

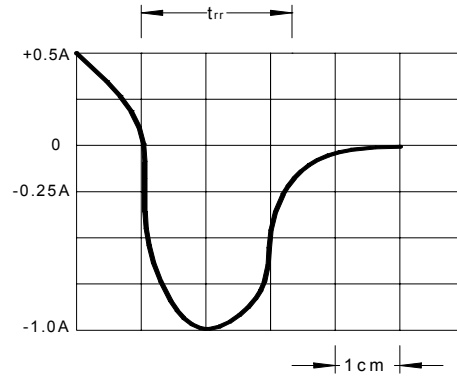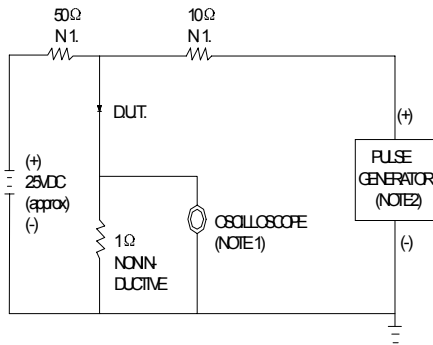


NOTES: 1. RISE TIME=7ns MAX. INPUT IMPEDANCE=1MΩ. 22pF
2. RISE TIME=10ns MAX. SOURCE IMPEDANCE=50Ω.

SET TIME BASE FOR 20/30 ns/cm

FIG.2 -FORWARD DERATING CURVE


AVERAGE FORWARD RECTIFIED CURRENT.
AMPERES

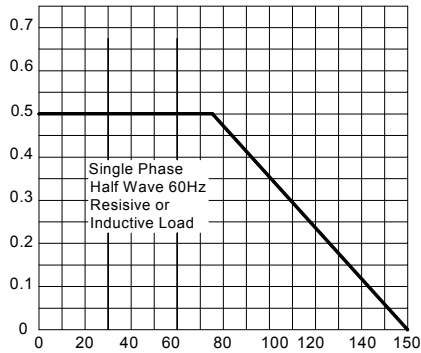

AMBIENT TEMPERATURE. °C

FIG.3-TYPICAL JUNCTION CAPACITANCE


JUNCTION CAPACITANCE, pF

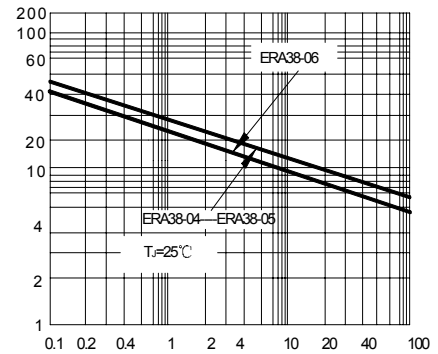

REVERSE VOLTAGE, VOLTS

FIG.4-PEAK FORWARD SURGE CURRENT


PEAK FORWARD SURGE CURRENT.
AMPERES

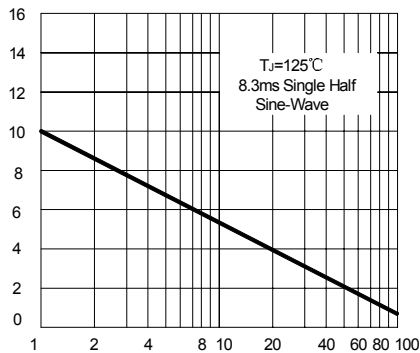

NUMBER OF CYCLES AT 60Hz

FIG.5 - TYPICAL FORWARD CHARACTERISTIC

INSTANTANEOUS FORWARD CURRENT
AMPERES

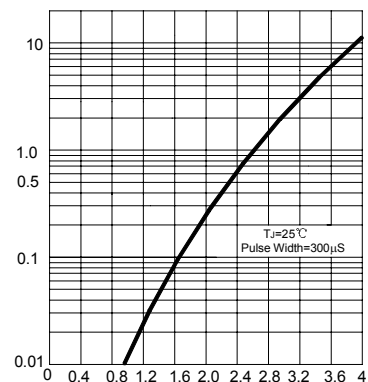

INSTANTANEOUS FORWARD VOLTAGE, VOLTS