
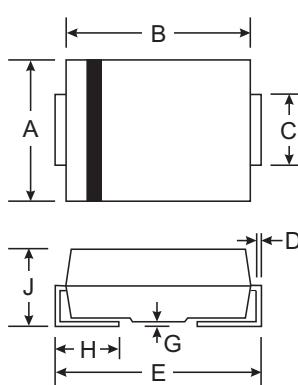


**VOLTAGE RANGE: 50 - 600V**
**CURRENT: 5.0 A**
**Features**

- Glass Passivated Die Construction
- Ideally Suited for Automatic Assembly
- Low Forward Voltage Drop, High Efficiency
- Low Power Loss
- Super-Fast Recovery Time
- Plastic Case Material has UL Flammability Classification Rating 94V-O

**Mechanical Data**

- Case: SMC/DO-214AB, Molded Plastic
- Terminals: Solder Plated, Solderable per MIL-STD-750, Method 2026
- Polarity: Cathode Band or Cathode Notch
- Marking: Type Number
- Weight: 0.21 grams (approx.)



SMC/DO-214AB		
Dim	Min	Max
A	5.59	6.22
B	6.60	7.11
C	2.75	3.18
D	0.15	0.31
E	7.75	8.13
G	0.10	0.20
H	0.76	1.52
J	2.00	2.62

All Dimensions in mm

**Maximum Ratings and Electrical Characteristics**  $T_A = 25^\circ\text{C}$  unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	ES5A	ES5B	ES5C	ES5D	ES5E	ES5G	ES5J	Unit
Peak Repetitive Reverse Voltage	V <sub>RRM</sub>								
Working Peak Reverse Voltage	V <sub>RWM</sub>	50	100	150	200	300	400	600	V
DC Blocking Voltage	V <sub>R</sub>								
RMS Reverse Voltage	V <sub>R(RMS)</sub>	35	70	105	140	210	280	420	V
Average Rectified Output Current @ $T_L = 75^\circ\text{C}$	I <sub>o</sub>								A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>								A
Forward Voltage @ $I_F = 5.0\text{A}$	V <sub>FM</sub>				0.95		1.25	1.7	V
Peak Reverse Current @ $T_A = 25^\circ\text{C}$ At Rated DC Blocking Voltage @ $T_A = 100^\circ\text{C}$	I <sub>RM</sub>				5.0	50			µA
Reverse Recovery Time (Note 1)	t <sub>rr</sub>				35				nS
Typical Junction Capacitance (Note 2)	C <sub>j</sub>				180				pF
Typical Thermal Resistance (Note 3)	R <sub>θ JL</sub>				40				°C/W
Operating and Storage Temperature Range	T <sub>j</sub> , T <sub>STG</sub>				-65 to +150				°C

Note: 1. Measured with I<sub>F</sub> = 0.5A, I<sub>R</sub> = 1.0A, I<sub>rr</sub> = 0.25A. See figure 5.

2. Measured at 1.0 MHz and applied reverse voltage of 4.0 V DC.

3. Mounted on P.C. Board with 8.0mm<sup>2</sup> land area.



SUNMATE

## RATINGS AND CHARACTERISTIC CURVES ES5A THRU ES5J

