

# CRYSTAL UNIT

# HC-49US3 DIP



## Applications

- Industrial Control Consumers.

## Features

- Dimensions:11.5 x 5.00 x3.68 mm.
- Freq range:3.579545~64MHz
- Through hole type crystal units.
- A great number of standard frequencies.


## Specifications

Standard Frequency	3.579545~64 MHz
Vibration Mode	AT Fundamental
Load Capacitance	12pF,20pF,or specify
Frequency Tolerance (at 25 )	±10ppm,±20ppm,or specify
Frequency Versus Temperature Characteristics	±20ppm,or specify
Operating Temperature	-20~+70℃, -40~+85℃, or specify
Storage Temperature	-40~+85℃ or specify
Shunt Capacitance	7 pF Max.
Level of Drive	1~500μWMax.(100uW typical)
Aging (at 25 °C )	±3ppm/year Max.

## Equivalent Series Resistance(ESR)

Fundamental			
3.579545 ~ 4MHz	180 Ω Max.	6 ~ 17 MHz	80 Ω Max.
4 ~ 5MHz	120 Ω Max.	7 ~ 10 MHz	60 Ω Max.
5 ~ 6 MHz	100 Ω Max.	10 ~ 27MHz	40 Ω Max.
3rd Overtone			
20 ~ 25 MHz	100 Ω Max.	25 ~ 64 MHz	80 Ω Max.

## Dimensions and Patterns [unit:mm]

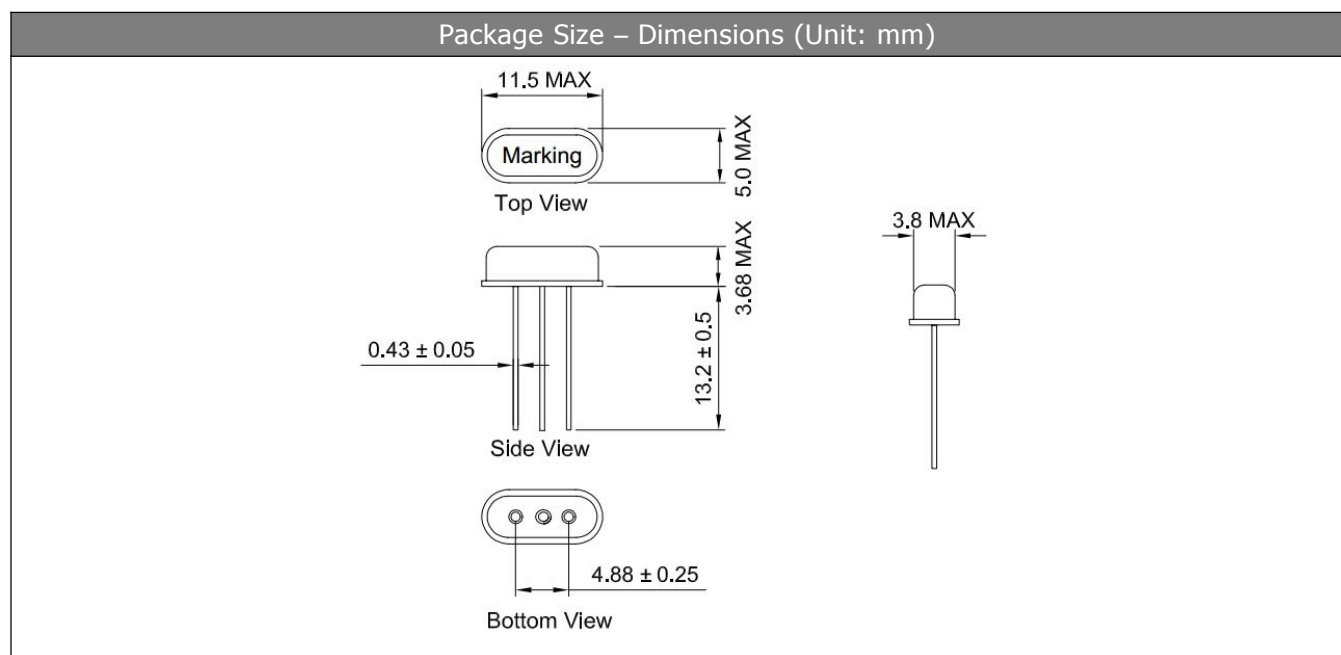

# CRYSTAL UNIT

# HC-49US3 DIP



## Solder ability

Dip terminals in RMA flux for  $5 \pm 0.5$  seconds. Under room temperature. Dip terminals in a  $260 \pm 5^\circ\text{C}$  solder bath for  $5 \pm 0.5$  seconds. The solder shall leave an undipped terminal length of 2 mm at their base .

## Resistance to Soldering Heat

Dip terminals in a  $260 \pm 5^\circ\text{C}$  solder bath for  $10 \pm 0.5$  seconds. The solder shall leave an undipped terminal length of 2 mm at their base.

## Packing

Deposit 200 pieces of the quartz crystal units in a polyethylene bag, and pack enough bags in a packing case to make a 10,000 pieces package. The packing format may be subject to change by quantity.